



End Tubular Wrench

19A0

- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Ø	D1	D2	L2	L3	L	g	kg	mm
19A00607	6 x 7	10	11	5	6	105	41	30	180
19A00809	8 x 9	13	14	6	7	110	55	30	180
19A01011	10 x 11	15	16	7.5	8	120	84	24	144
19A01213	12 x 13	18	19	9	9.5	140	141	18	144
19A01415	14 x 15	20	22	10	11	145	137	12	96
19A01617	16 x 17	23	24	11	12	155	186	10	90
19A01819	18 x 19	25	26	13	15	165	240	8	72
19A02022	20 x 22	28	30	15	16	170	291	8	72
19A02123	21 x 23	29	31	15	17	185	346	6	54
19A02426	24 x 26	33	35	19	21	190	425	4	36
19A02528	25 x 28	34	37	19	21	205	497	4	24
19A02729	27 x 29	37	39	21	22	210	590	2	12
19A03032	30 x 32	40	42	22	26	210	680	2	12




• Double end socket wrench for the hollow tube design, a long-type screw may be used.

19A0-09

KT NO.	L	Ø	Ø1	Ø2	Ø3	Ø4	Applied to socket wrench sizes
19A0-09	220	7.8	6.75	4.75	5.75	2.8	19A00607~19A02022
19A0-15	300	12.7	11.75	9.75	-	-	19A02123~19A03032

19A0-15

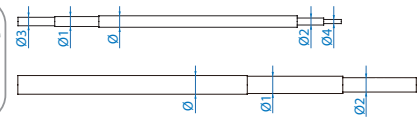


Flexible Speed Wrench & Set

KT No. & D1

3730M

- Flexible head, open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Size	D1	D2	H1	H2	L	g	kg	mm
373008M	8	16.2	16.7	4.3	6.5	127.0	35	12	432
373009M	9	18.2	18.6	4.6	6.9	131.5	42	12	384
373010M	10	20.3	20.0	5.0	7.3	136.0	55	12	384
373011M	11	22.5	21.8	5.4	7.7	141.0	65	10	320
373012M	12	24.3	23.0	5.8	8.2	147.5	80	10	240
373013M	13	26.8	25.2	6.1	8.6	154.0	93	10	240
373014M	14	28.7	26.8	6.4	9.0	160.0	109	10	200
373015M	15	30.5	28.3	6.9	9.4	169.0	129	10	160
373016M	16	32.9	29.8	7.2	9.9	179.0	149	10	160
373017M	17	34.5	31.8	7.6	10.3	190.0	178	10	160
373018M	18	37.0	32.8	8.0	10.7	203.0	201	10	160
373019M	19	39.2	33.9	8.6	11.2	215.0	231	10	80
373021M	21	46.0	40.0	9.0	13.0	274.0	392	6	54
373022M	22	46.0	40.0	9.0	13.0	274.0	392	6	54
373024M	24	52.2	46.0	10.0	14.5	296.0	547	6	54

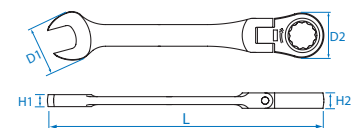

WRENCHES