



Impact Wrench

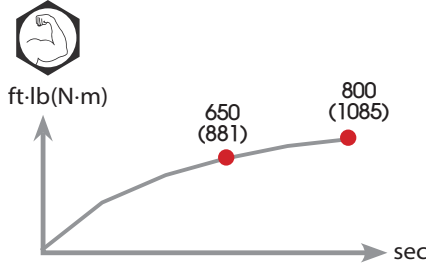

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip



KT NO.	Square drive Inch mm	Type Std./Long anvil	Std. bolt size Inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length Inch mm	Air inlet Inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S ²	Net weight kgs lbs
33431-065	1/2" 12.70	Std.anvil	3/4" M19	8000	650 881	6-7/8" 175	1/4"BSPT	3/8"	6.2 90	139 4.9	101.50	9.37	2.58 5.69 1 / 8

33611

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust



33621 / 33622



KT NO.	Square drive Inch mm	Type Std./Long anvil	Std. bolt size Inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length Inch mm	Air inlet Inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S ²	Net weight kgs lbs
33611-055	3/4" 19.05	Std. anvil	7/8" M20	6500	700 949	7-13/32" 188	1/4"BSPT	3/8"	6.2 90	125 4.4	96.56	8.64 3.00	6.61 1 / 8
33611-056	3/4" 19.05	Std. anvil	7/8" M20	6500	700 949	7-13/32" 188	1/4"NPT	3/8"	6.2 90	125 4.4	96.56	8.64 3.00	6.61 1 / 8
33621-075	3/4" 19.05	Std. anvil	1" M24	6500	800 1085	8-63/64" 228	1/4"BSPT	3/8"	6.2 90	198 7.0	97.28	6.89 4.50	9.92 1 / 4
33621-076	3/4" 19.05	Std. anvil	1" M24	6500	800 1085	8-63/64" 228	1/4"NPT	3/8"	6.2 90	198 7.0	97.28	6.89 4.50	9.92 1 / 4
33622-075	3/4" 19.05	Long anvil	1" M24	6500	800 1085	12-63/64" 330	1/4"BSPT	3/8"	6.2 90	198 7.0	96.68	6.46 5.00	11.02 1 / 4
33622-076	3/4" 19.05	Long anvil	1" M24	6500	800 1085	12-63/64" 330	1/4"NPT	3/8"	6.2 90	198 7.0	96.68	6.46 5.00	11.02 1 / 4