


Pipe Wrench

6532

- Extra heavy straight type
- Forged parts tempered
- Teeth offset against direction of rotation and induction-hardened

| KT NO. | A mm | Overall length | | g | / |
|---------|---------|----------------|------|------|--------|
| | | inch | mm | | |
| 6532-08 | 27 | 8 | 180 | 380 | 1 / 40 |
| 6532-10 | 30 | 10 | 245 | 700 | 1 / 20 |
| 6532-12 | 40 | 12 | 275 | 1050 | 1 / 20 |
| 6532-14 | 50 | 14 | 315 | 1340 | 1 / 12 |
| 6532-18 | 60 | 18 | 395 | 1960 | 1 / 12 |
| 6532-24 | 75 | 24 | 525 | 3640 | 1 / 6 |
| 6532-36 | 85 | 36 | 765 | 6300 | 1 / 2 |
| 6532-48 | 110 | 48 | 1025 | 9100 | 1 / 2 |

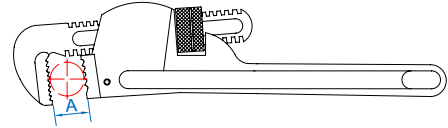

Aluminum Pipe Wrench

6533L

- 25% lighter than heavy-duty models, easy to use
- Straight pipe wrench is suitable for all types of pipe work
- Drop-forged jaw is heat-treated to resist distortion
- Easy-spin adjusting nut, quick to adjust size

| KT NO. | A mm | Overall length | | g | / |
|----------|---------|----------------|------|------|--------|
| | | inch | mm | | |
| 6533-10L | 30 | 10 | 254 | 530 | 6 / 24 |
| 6533-12L | 40 | 12 | 300 | 790 | 6 / 18 |
| 6533-14L | 50 | 14 | 356 | 940 | 6 / 12 |
| 6533-18L | 60 | 18 | 455 | 1480 | 3 / 6 |
| 6533-24L | 75 | 24 | 600 | 2470 | 2 / 4 |
| 6533-36L | 85 | 36 | 910 | 4670 | 1 / 2 |
| 6533-48L | 110 | 48 | 1200 | 7960 | 1 / 2 |

