

Soldering Iron Tip (Conical Type)

6BC23-1

- Copper-based iron tips are manufactured using patented process which produces a uniform iron and chrome plating thickness

| KT NO. | Rating W | Ø mm | | |
|---------|----------|------|----|------------|
| 6BC23-1 | 30 / 40 | 4 | 13 | 100 / 4200 |
| 6BC26-1 | 60 | 6 | 16 | 100 / 1600 |
| 6BC26-3 | 60 | 6 | 16 | 100 / 1600 |

6BC26-1

6BC26-3

- All tips are pre-tinned



Gas Soldering Iron Set

6BC3007

- Gas soldering iron set with four tips, reflector and desolder wire
- Power range: 30W-150W
- Soldering temperature: 400°C~450°C (750°F~840°F)
- Torch temperature: 1300°C (2400°F)
- Fuel capacity: 20ml
- Tank fuel for 90 minutes operation
- Ready to use 45 seconds after ignition



8 PC.

| KT NO. | Contents | 0.45 | |
|----------|----------|-----------------------------------|----|
| 6BC372 | | Gas soldering iron 257mm | 20 |
| 6BC372-1 | | Conical | |
| 6BC372-2 | | 2.5mm round | |
| 6BC372-3 | | 3.5mm chisel | |
| 6BC372-4 | | 4.5mm angle | |
| 6BC372-5 | | Reflector | |
| 6BF21-17 | | Desolder wire / Sn 99.3%, Cu 0.7% | |
| | | Foam | |



Desolder Wire

6BF11-17

- 40% lead and 60% tin




| KT NO. | Size mm | | |
|----------|---------|----|----------|
| 6BF11-17 | 1.0 | 17 | 20 / 480 |

Desoldering Pump

6BD11


- One-hand operation
- ABS Body, teflon nozzle

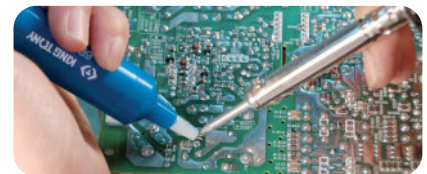


| KT NO. | Overall length mm | | |
|--------|-------------------|----|--------|
| 6BD11 | 195 | 42 | 8 / 32 |

6BD22

- Anti-static solder desoldering pump
- Teflon suction head
- Aluminum body



- Turn down the body



- Clean

- Turn up the body

| KT NO. | Overall length mm | | |
|--------|-------------------|----|----------|
| 6BD22 | 197 | 85 | 50 / 100 |

