

# Air Hose Reel

7991

- Automatic rewind with SK5 alloy steel spring
- 16 teeth gear-stop ensures safety
- 300 psi working pressure allowed
- Sturdy structure with 0.7mm thick steel rail stored in iron case
- Replaceable air hose design & hanging rack



**CAUTION**  
Do not pull the air hose when seeing tag **STOP**



- Pull the air hose to the end till it shows joint replacement



- Install new air hose



- Dismantle connection



- 16 teeth gear design can spread stress evenly and stop returning



1 Bar = 1.01972 kgf/cm<sup>2</sup>  
1 Bar = 14.5036 psi

| KT NO.   | Hose I.D. mm | Hose O.D. mm | Hose length (M) | Type  | Air Inlet / outlet inch | Working pressure psi | kg  | kg | kg |
|----------|--------------|--------------|-----------------|-------|-------------------------|----------------------|-----|----|----|
| 79910-10 | 8            | 12           | 10              | Asian | 1/4"BSPT                | 300                  | 5.5 | 1  | 2  |
| 79910-15 | 8            | 12           | 15              | Asian | 1/4"BSPT                | 300                  | 6.5 | 1  | 2  |
| 79911-10 | 8            | 12           | 10              | US    | 1/4"NPT                 | 300                  | 5.5 | 1  | 2  |
| 79911-15 | 8            | 12           | 15              | US    | 1/4"NPT                 | 300                  | 6.5 | 1  | 2  |
| 79912-10 | 8            | 12           | 10              | EU    | 1/4"BSPT                | 300                  | 5.5 | 1  | 2  |
| 79912-15 | 8            | 12           | 15              | EU    | 1/4"BSPT                | 300                  | 6.5 | 1  | 2  |

# Air Lubricator

799A

- Semi auto drain valve
- Steel guards offer better protection
- Easy installation and disassembly

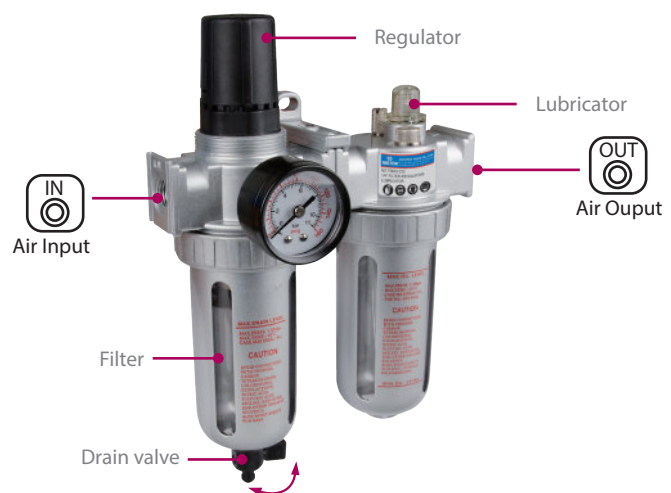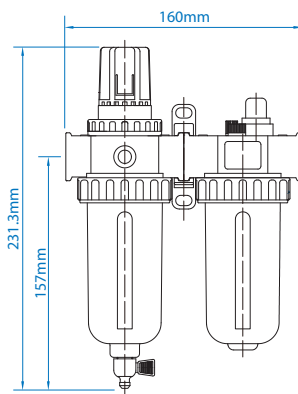

| KT NO.    | Port Size (inch) | Filter Element (μ) | Max Input Pressure (psi) | Max Output Pressure (psi) | Max Flow (L/min) | Operation Temperature Range (°C) | Drain Capacity (ml) | Oil Capacity (ml) | Air Inlet (inch) | Weight (Kgs) | Weight (lbs) | kg     |
|-----------|------------------|--------------------|--------------------------|---------------------------|------------------|----------------------------------|---------------------|-------------------|------------------|--------------|--------------|--------|
| 799A0-23C | 1/4"             | 5                  | 215                      | 7~150                     | 1750             | 5 ~ 60                           | 80                  | 150               | 1/4"BSPT         | 1.40         | 3.17         | 1 / 12 |
| 799A1-23C | 1/4"             | 5                  | 215                      | 7~150                     | 1750             | 5 ~ 60                           | 80                  | 150               | 1/4"NPT          | 1.42         | 3.17         | 1 / 12 |
| 799A0-33C | 3/8"             | 5                  | 215                      | 7~150                     | 2500             | 5 ~ 60                           | 80                  | 150               | 3/8"BSPT         | 1.14         | 2.51         | 1 / 12 |
| 799A1-33C | 3/8"             | 5                  | 215                      | 7~150                     | 2500             | 5 ~ 60                           | 80                  | 150               | 3/8"NPT          | 1.14         | 2.51         | 1 / 12 |
| 799A0-43C | 1/2"             | 5                  | 215                      | 7~150                     | 3000             | 5 ~ 60                           | 80                  | 150               | 1/2" BSPT / NPT  | 1.15         | 2.53         | 1 / 12 |