


Impact Accessory

8260

- Extension bar
- DIN 3121

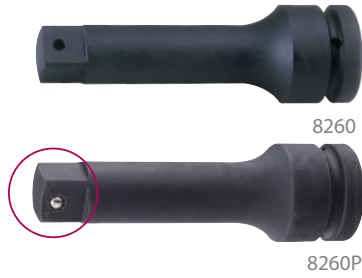


8260

8260P

KT NO.	Overall Length		g	g
	Inch	mm		
8260-07	7	175	1400	1 / 12
8260-10	10	250	1932	1 / 12
8260-13	13	330	2458	1 / 8
8260-07P	7	175	1400	1 / 12
8260-10P	10	250	1932	1 / 12
8260-13P	13	330	2458	1 / 8

8797

- Universal joint
- DIN 3121



8797P

1"



8797

8797P

KT NO.	Overall Length		D mm	g	g
	Inch	mm			
8797	5	125	60	1491	1 / 18
8797P	5	125	60	1491	1 / 18

8866

- Adapter
- Convert to 3/4" drive
- 8866 → Max. torque : 1412 N·m
- DIN 3121



8866

8866P

KT NO.	Spec.	g	g
8866	1" F x 3/4" M	606	4 / 32
8866P	1" F x 3/4" M	606	4 / 32

8869

- Adapter
- Convert to 1-1/2" drive
- DIN 3121



8869

8869P

KT NO.	Spec.	g	g
8869	1" F x 1-1/2" M	941	1 / 24
8869P	1" F x 1-1/2" M	941	1 / 24

90405

- Locking ring
- High tensile rubber material

90406

1"

90605


- Locking pin
- Chrome vanadium steel
- DIN 3129

90606

1"



90605
90606



90405
90406

KT NO.	Type	∅	d / l	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"~2-3/4") 8435M (24~60mm) 8435S (15/16"~2-1/4") 8835M (24~60mm)
90605	pin	5.0	45	8514M.8514S.8534M.806519M 8260.8797.8866.8869
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"~3-1/2")
90606	pin	5.0	75	