


3-In-1 Inflator

9BM

- Diaphragm pressure gauge
- Accuracy: ANSI B40.100 $\pm 3\%$ ~ $\pm 2\%$ ~ $\pm 3\%$
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control positions for inflate/deflate level
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure Range:
0-160 psi (9BM21) / 0-220 psi (9BM22)
- Built in hang-up hook allows easy storage

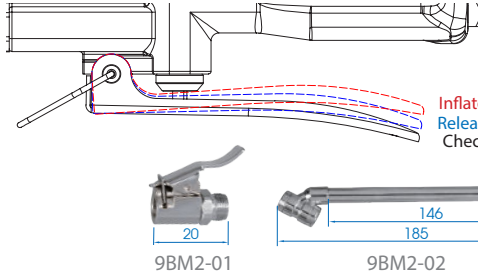

KT NO.	Pressure range (psi)	Air Inlet (BSPT/NPT)	L (mm)		Air hose (ID)	g	/
			L1	L2			
9BM2110	160	1/4"BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4"BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4"NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4"BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4"NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)			20	-	25	-
9BM2-02	(included in 9BM2210A & 11A only)			185	-	105	-

PU Air Spiral Hose

79953

79960

79962

- Super mechanical strength and excellent abrasive resistance
- Superior heat and cold resistance
- Oil resistance
- Light weight
- Temperature resistance from -20°C ~ $+60^{\circ}\text{C}$



79953



79960



79962

KT NO.	Hose I.D. (mm)	Hose O.D. (mm)	Hose Length (M)	Working Pressure (psi)	Working Pressure (bar)	Maximum Pressure (psi)	Maximum Pressure (bar)	Type	Male PT Fitting (Inch)	Weight		/
										(kgs)	(lbs)	
79953-10	8	12	10	108	7.4	320	22.2	-	1/4"BSPT	0.80	1.76	1 / 20
79953-15	8	12	15	108	7.4	320	22.2	-	1/4"BSPT	1.30	2.87	1 / 16
79960-10	8	12	10	160	11.0	640	44.1	Asian	1/4"BSPT	0.93	2.05	1 / 20
79960-15	8	12	15	160	11.0	640	44.1	Asian	1/4"BSPT	1.31	2.87	1 / 16
79960-20	8	12	20	160	11.0	640	44.1	Asian	1/4"BSPT	1.66	3.64	1 / 10
79962-10	8	12	10	160	11.0	640	44.1	EU	1/4"BSPT	0.92	2.02	1 / 20
79962-15	8	12	15	160	11.0	640	44.1	EU	1/4"BSPT	1.31	2.87	1 / 16
79962-20	8	12	20	160	11.0	640	44.1	EU	1/4"BSPT	1.63	3.78	1 / 10