


Electronic Torque Adapter

34607-1A



Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m / ft·lb , 0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AA x 2 PC.
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	1250 N·m (922 ft·lb)

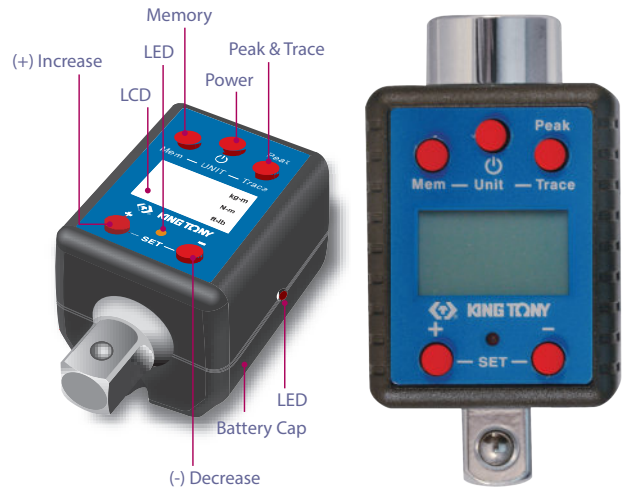

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range			Size mm	g	/ /
		N·m	ft·lb	kgf·m			
34607-1A	3/4"	200 ~1000 N·m	147.6~738 ft·lb	20.4~102 kgf·m	L110 x W56 x H60	585	6 / 24

Torque Screwdriver

34211

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque ± 5%(CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010



► Quick-Release

34011



KT NO.	Spec.	Torque range cN·m / N·m / in·lb	Incr.	Overall length mm	g	/ /
34211-3DG	⊙	4~9 N·m	0.1 N·m	196	475	1 / 24
34011-1DG	○	30~120 cN·m	1 cN·m	180	207	1 / 24
34011-1EG	○	3~15 in·lb	0.1 in·lb	180	207	1 / 24
34011-2DG	○	1.5~6.5 N·m	0.1 N·m	196	475	1 / 24
34011-2EG	○	10~50 in·lb	1.0 in·lb	196	475	1 / 24